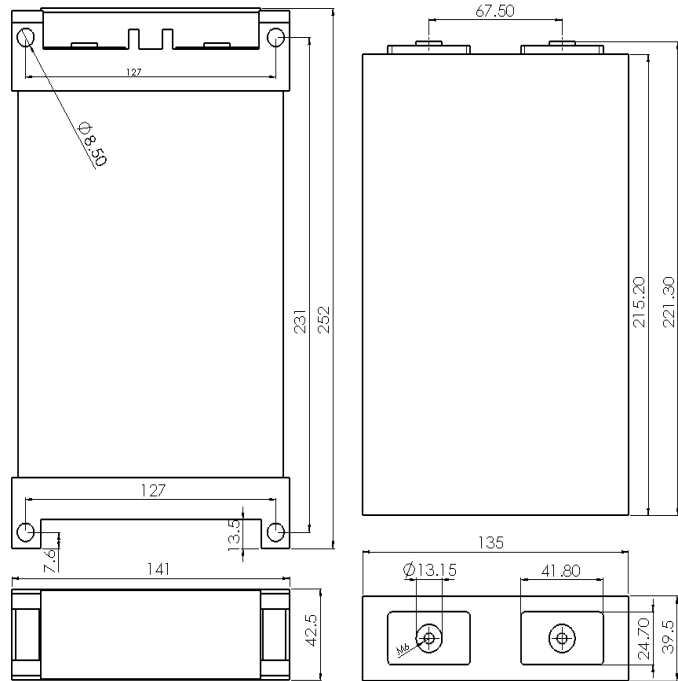


Photo

Drawing


Nominal Capacity		80Ah@1C Discharging
Minimum Capacity		80Ah@1C Discharging
Nominal Voltage		2.3V
Internal Resistance		≤0.3mΩ
Charging(CC-CV)	Charging Current	5C continuous / 10C peak
	Charging Upper Limit Voltage	2.8V
Discharging	Discharging Current	4C continuous / 8C peak
	Discharging Cut-off Voltage	1.5V
Charging Time	Standard Charging	0.25H
	Quick-acting Charging	0.2H
Operation Temperature	Charging	-40℃~45℃
	Discharging	-40℃~55℃
Weight		2.65Kg
Size / with Plastic Holders		39.5x135x235mm/ 42.5x141x252mm
Shell Material		Stainless Steel 304