


Photo



Drawing

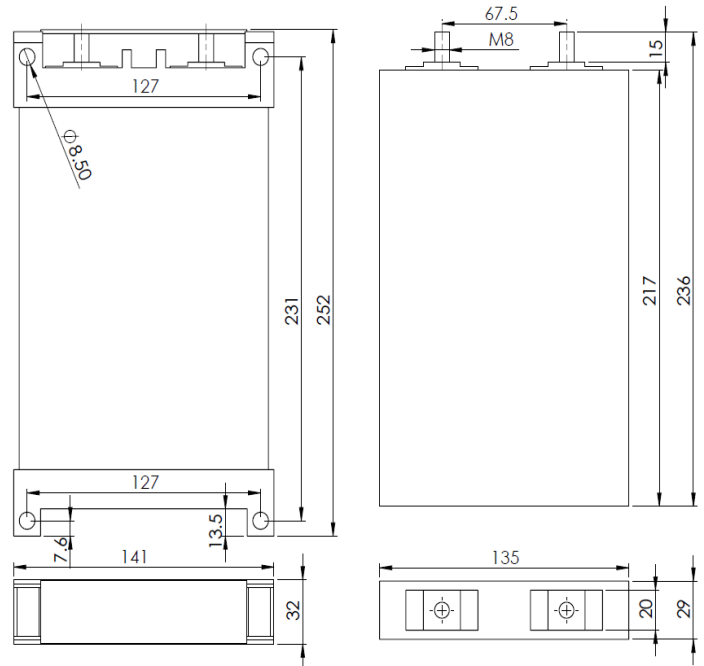

Nominal Capacity		90Ah@0.3C Discharging
Minimum Capacity		90Ah@0.3C Discharging
Nominal Voltage		3.7V
Internal Resistance		≤0.45mΩ
Charging(CC-CV)	Charging Current	0.5C continuous / 1C peak
	Charging Upper Limit Voltage	4.2V
Discharging	Discharging Current	2C continuous / 4C peak
	Discharging Cut-off Voltage	3.0V
Charging Time	Standard Charging	2H
	Quick-acting Charging	1H
Operation Temperature	Charging	0°C~45°C
	Discharging	-20°C~55°C
Cycle life		3,000 cycles after 80% DOD
Weight		1.90Kg
Size / with Plastic Holders		29x135x235mm/ 32x141x252mm
Shell Material		Stainless Steel 304
Bolt design		Male and female available

