


Photo

Drawing



Nominal Capacity		120Ah@0.3C Discharging
Minimum Capacity		120Ah@0.3C Discharging
Nominal Voltage		3.70V
Internal Resistance		≤ 0.3mΩ
Charging(CC-CV)	Charging Current	0.5C continuous / 1C peak
	Charging Upper Limit Voltage	4.2V
Discharging	Discharging Current	2C continuous
	Discharging Cut-off Voltage	3.0V
Charging Time	Standard Charging	2H
	Quick-acting Charging	1H
Operation Temperature	Charging	0°C~45°C
	Discharging	-20°C~55°C
Weight		2.55Kg
Size / with Plastic Holders		39.5x135x221mm/ 43x141x252mm
Shell Material		Stainless Steel 304

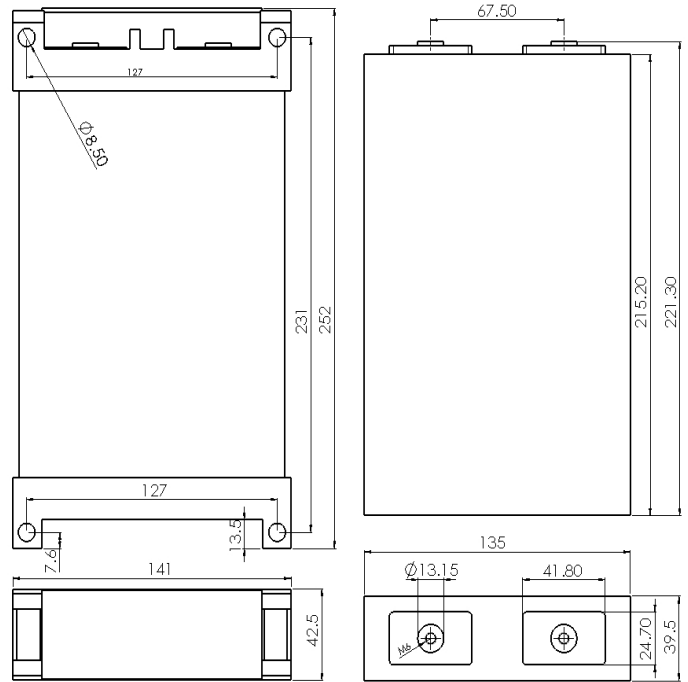