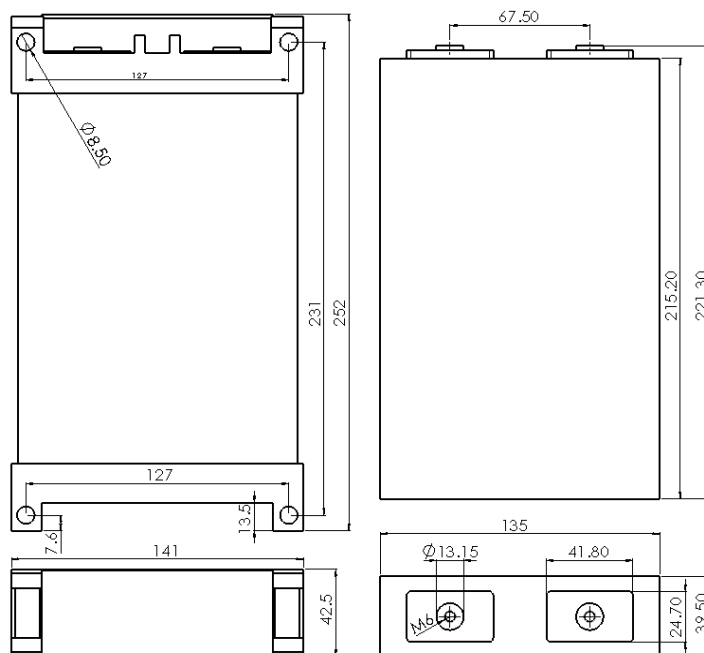


Photo

Drawing


Nominal Capacity		100Ah@0.3C Discharging
Minimum Capacity		100Ah@0.3C Discharging
Nominal Voltage		3.20V
Internal Resistance		≤0.35mΩ
Charging(CC-CV)	Charging Current	0.5C continuous / 1C peak
	Charging Upper Limit Voltage	3.65V
Discharging	Discharging Current	3C continuous
	Discharging Cut-off Voltage	2.50V
Charging Time	Standard Charging	2H
	Quick-acting Charging	1H
Operation Temperature	Charging	0°C~45°C
	Discharging	-20°C~55°C
Cycle life		5'000 cycles after 80% DOD
Weight		2.25Kg
Size / with Plastic Holders		39.5x135x221mm/ 42.5x141x252mm
Shell Material		Stainless Steel 304